



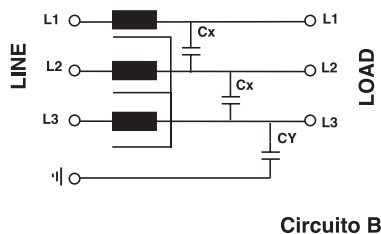

Three-phase filter with or without neutral line.

Filtro rete trifase con o senza neutro.

### Circuit diagram

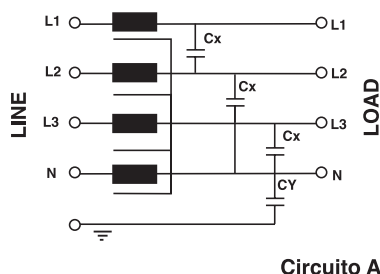

### Technical Specifications:

#### Manufacture

Metal case, internal components sealed with self-extinguishing resin Vo

#### Connections

Faston 6.3 x 0.8mm  
 Ground terminal connected to case

### Electrical specifications:

<b>Rated voltage (Vr)</b>	440 Vac at 50/60 Hz
<b>Rated current (Ir)*</b>	referred to room temp. = 40°C
<b>Leakage current (IL)</b>	≤ 0,5 mA
<b>Voltage test (2s.)</b>	line to ground 3000 Vdc or 1800 Vac line to line 1700 Vdc
<b>Climatic category</b>	HPF (25/085/21) -25°C to +85°C

### Caratteristiche tecniche:

#### Costruzione

Custodia metallica, componenti interni sigillati con resina autoestinguente Vo


#### Terminali

Faston 6.3 x 0.8mm  
 Terminale di terra collegato alla custodia

### Caratteristiche elettriche:

<b>Tensione nominale (Vr)</b>	440 Vac a 50/60 Hz
<b>Corrente nominale (Ir)*</b>	referita ad una temp. di 40°C
<b>Corrente di fuga (IL)</b>	≤ 0,5 mA
<b>Tensione di prova (2s.)</b>	linea e massa 3000 Vdc o 1800 Vac linea e linea 1700 Vdc
<b>Categoria climatica</b>	HPF (25/085/21) -25°C to +85°C

Code	IR(A)*	Cx(µF)	Cy(pF)	L(mH)	Case	Circuit
AR120.3A	3	0.1	4700	1	F3	A
AR120.6A	6	0.1	4700	0.5	F3	A
AR120.10A	10	0.1	4700	0.4	F3	A
AR120.10A/S	10	0.1	22000	0.4	F3	A
AR120.20A	20	0.1	22000	0.15	F3	A
AR120.3R.3A	3	0.1	4700	1	F3	B
AR120.3R.6A	6	0.1	4700	0.5	F3	B
AR120.3R.10A	10	0.1	4700	0.4	F3	B
AR120.3R.10A/S	10	0.1	22000	0.4	F3	B
AR120.3R.20A/S	20	0.1	22000	0.15	F3	B

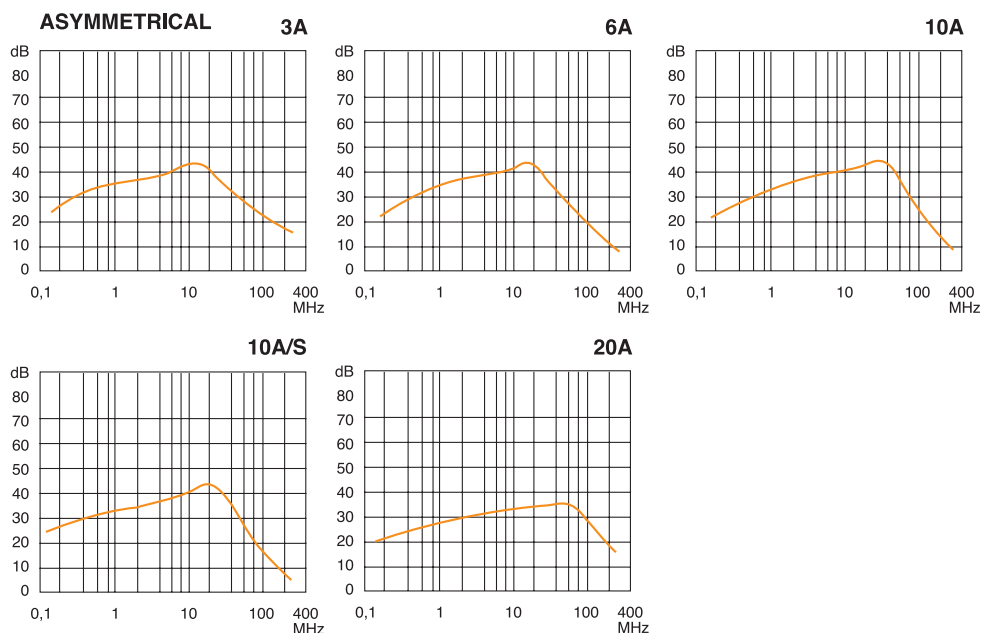

### Dimensions:

See the page Dimensions  
 Consultare la pagina Dimensioni

### APPROVALS

